




CLEANVOLT BANTAM ELECTRIC HOT WATER BOILERS - 480 Volt

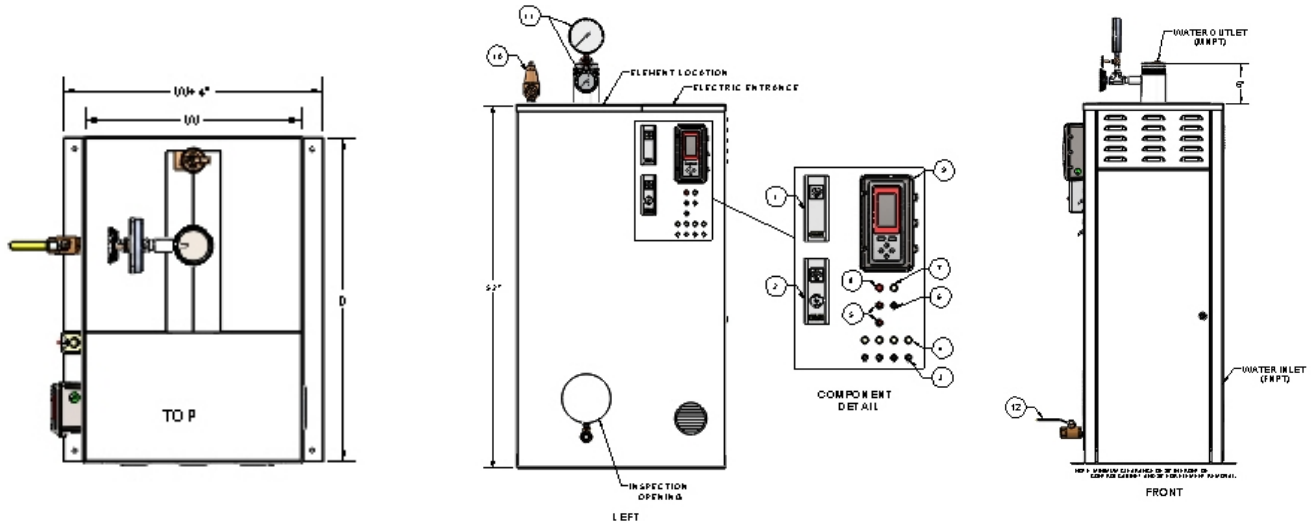

Model	Dimensions			Tank Information		Supply/Return	Drain
	H	W	D	Size	Gallons		
BNTM 1	52"	20"	30"	12" dia	22	3" NPT	3/4"
BNTM 2	52"	24"	34"	16" dia	36	3" NPT	1"
BNTM 3	52"	28"	38"	20" dia	56	3" NPT	1 1/4"
BNTM 4	52"	32"	46"	24" dia	80	3" NPT	1 1/4"
BNTM 5	52"	38"	48"	30" dia	126	4" flg	1 1/4"

Model	Max Input KW @480V	Max MBH Input	Max No. of Elements	Max GPM	Shipping Weight
BNTM 1	160	546	8	230	600
BNTM 2	240	819	12	230	800
BNTM 3	480	1638	24	230	1100
BNTM 4	600	2047	30	230	1800
BNTM 5	720	2457	36	300	2300

Components / Controls:

- Manual Limit Switches
- Pilot Lights
- PB Switches (LWCO Test / Reset)
- Toggle Switch Power Control
- Temperature Limit, Auto Reset
- Temperature Limit, Manual Reset
- Pilot Light, Amber (Control Power ON), Red (Low Water)
- Temperature Setpoint / Control / Readout
- Safety Relief Valve, Temperature and Pressure Gauges

	TRIAD BOILER SYSTEMS, INC. West Chicago, IL 60185 PH: 630-562-2700 www.com.com
--	---



**CLEANVOLT BANTAM
ELECTRIC HOT WATER BOILERS - 480 Volt
Detail on Selected Boilers***

MODEL	RATING		ELEMENTS		Number of	
	MBH	KW	Qty	KW	Circuits	Steps@KW
BNTM1 - B	51	15	1	15	1	1@15
BNTM1 - C	61	18	1	18	1	1@18
BNTM1 - D	68	20	1	20	1	1@20
BNTM1 - B	102	30	2	15	1	1@30
BNTM1 - C	123	36	2	18	1	1@36
BNTM1 - D	136	40	2	20	1	1@40
BNTM1 - B	154	45	3	15	2	1@15, 1@30
BNTM1 - C	184	54	3	18	2	1@18, 1@36
BNTM1 - B	205	60	4	15	2	2@30
BNTM1 - C	246	72	4	18	2	2@36
BNTM1 - B	256	75	5	15	3	1@45, 1@30
BNTM1 - D	273	80	4	20	2	2@40
BNTM1 - C	307	90	5	18	3	1@18, 2@36
BNTM1 - D	341	100	5	20	3	1@20, 2@40
BNTM1 - B	358	105	7	15	4	1@45, 2@30
BNTM1 - C	368	108	6	18	3	3@36
BNTM1 - D	409	120	6	20	3	3@40
BNTM1 - C	430	126	7	18	4	1@18, 3@36
BNTM2 - B	461	135	9	15	5	1@45, 3@30
BNTM1 - D	478	140	7	20	4	1@20, 3@40
BNTM1 - C	491	144	8	18	4	4@36
BNTM2 - B	512	150	10	15	5	5@30
BNTM1 - D	546	160	8	20	4	4@40
BNTM2 - B	563	165	11	15	6	1@45, 4@30
BNTM2 - C	614	180	10	18	5	5@36
BNTM2 - D	682	200	10	20	5	5@40
BNTM3 - B	717	210	14	15	7	7@30
BNTM2 - C	737	216	12	18	6	6@36
BNTM3 - D	768	225	15	15	8	1@45, 6@30
BNTM2 - B	819	240	12	20	6	6@40
BNTM3 - B	819	240	16	15	8	8@30
BNTM3 - C	860	252	14	18	7	7@36
BNTM3 - B	870	255	17	15	9	1@45, 7@30
BNTM3 - C	921	270	15	18	8	1@18, 7@36
BNTM3 - D	955	280	14	20	7	7@40
BNTM3 - C	983	288	16	18	8	8@36
BNTM3 - C	1105	324	18	18	9	1@72, 7@36

The letter B, C or D at the end means that boiler uses 15KW, 18KW or 20KW elements, respectively.

Please note that boilers are available in 208/240volt, 380/415volt, and 600volt.

*Contact your Rep or Triad Boiler Systems if you do not see your specific model listed here.

	TRIAD BOILER SYSTEMS, INC. West Chicago, IL 60185 PH: 630-562-2700 www.com
--	---



TRIAD BOILER SYSTEMS, INC.

West Chicago, IL 60185

PH: 630-562-2700

www.com