

ANPL 6.2/6.4

Progressive Cavity Pump for Metering & Dosing

Features

- * Rugged Design
- * 1" NPTF
- * Non-Pulsating Flow
- * 316 Stainless Steel Optional
- * PTFE Stators Available
- * Corrosion Resistant

Pump Description

The ANPL 6.2 & 6.4 Series is a rugged series of medium sized progressive cavity metering and dosing pumps available immediately from our inventory at Liberty Process Equipment. This pump is an ideal addition to the industrial applications for additives for lubricant systems.

The ANPL 6.2 & 6.4 Series of Progressive Cavity Metering Pump is rated up to 5.0 GPM and at discharge pressures up to 350 psi in our 4 range design. The ANPL Pump is offered in cast iron or standard 316 Stainless Steel. The ANPL Pumps are offered with our standard 1" NPTF connections or optional 1" 150# RF Flanges. Stators are available in Buna Nitrile, Viton and also in PTFE Teflon for the highest standards in corrosion resistance.

Liberty Process can offer a drive and control option to meet your needs and budget. From a simple, fixed speed motor to a DC or variable frequency drive controlled pump unit we can offer it.

Materials

Rotor: *Chrome Plated 316 Stainless Steel*

Stator: *Buna, PTFE, Viton™*

Motor: *1, 2, and 3 hp*


Inlet: *1" NPT*

Outlet: *1" NPT*

Bases: *Steel and Stainless Steel*



ANPL 6.2/6.4

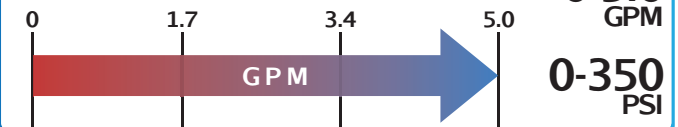

Curves

ANPL
6.2/6.4



Please
Click
the Icon

Drawings

ANPL
6.2/6.4




Please
Click
the Icon


Click To Visit www.libertyprocess.com >>



Liberty Process Equipment, Inc.
2525 S Clearbrook Dr.
Arlington Heights, IL 60005-4623
P-(847) 640-7867
F-(847) 640-7855
sales@libertyprocess.com

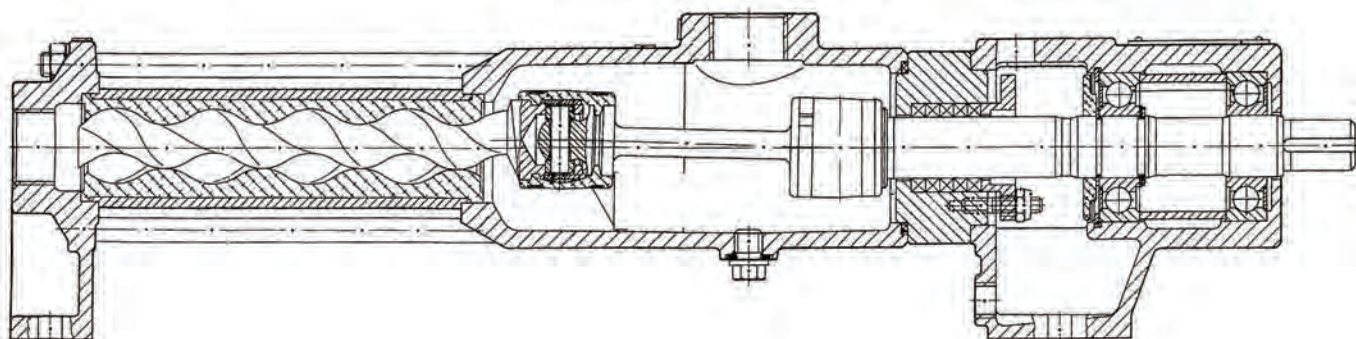

ANPL 6.2

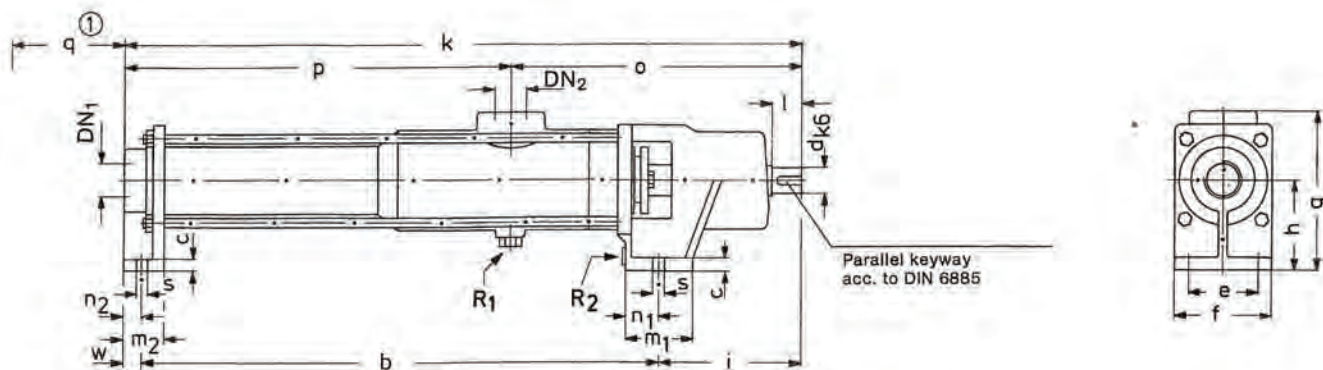

Dimensions in mm.
Internal diameters of suction, discharge and auxiliary connections in inch.
The manufacturer reserves the right to make technical modifications without prior notice.

Direction of rotation:
Counterclockwise looking from the drive end is standard, in which case DN₁ = delivery connection, DN₂ = suction connection. Opposite direction of rotation is possible in which case DN₁ = suction connection, DN₂ = delivery connection.

Pump size	Pump dimensions																	Suction/ Discharge connections DN ₂ /DN ₁ ②	Approx. weight in kg		
	b	c	d	e	f	g	h	i	k	l	m ₁	m ₂	n ₁	n ₂	o	p	m ₁			s	w
3.2	381								523							270	160			R 1	11
6.2	421	10	20	70	85	135	80	125	563	30	60	35	30	17	253	310	160	9	17	R 1	11,5
12.2	457								599							346	190			R 1 1/4	12

ANPL 6.2

Typical Performance Curve for water at 68 Deg. F.

Size - 6

Stage(s) - 2

Starting Torque = 6.3 to 9.6 ft. lb

Max Pres. = 175 PSI

Max RPM = 1400

